

# ACOUSTIC ARTWORK PET felt products



## FEATURES

- Sustainable product – partially from post-consumer PET and easily recyclable
- Customization options – colours and patterns
- Quick and easy assembly and disassembly
- Certified sound absorption, NRC = 0,77

## GUARANTEE

- 5 years, except for adhesive fittings (2 years)


## TECHNICAL INFORMATION

### Screen composition

- PET fiber board 9 mm

### Set of suspensions AWZ001 (2 pcs.)

- Suitable only for PET partitions (up to 10 mm thick);
- Only a single product can be suspended per set;
- Set includes ceiling mounting (masonry/wood/gypsum);
- Adjustable cable gripper;
- Ø1,5 mm wire rope L-50-2000 mm.

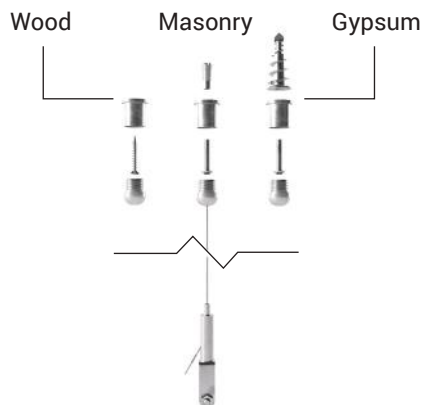

### Set of suspensions AWZ004 (2 pcs.)


- Suitable only for PET partitions (up to 10 mm thick);
- Only a single product can be suspended per set;
- Set includes ceiling mounting (for T24 Armstrong profile);
- Adjustable cable gripper;
- Ø1,5 mm wire rope L-50-2000 mm.

T24 Armstrong profile



### Set of suspensions AWZ002 (1 pc.)

- Suitable only for PET clouds;
- Only a single product can be suspended per set;
- Set includes ceiling mounting (masonry/wood/gypsum);
- Ø1,5 mm wire rope L-50-2000 mm;
- Adjustable cable gripper;
- Two Ø1,5 mm wire ropes with metal plates L-1500 mm.

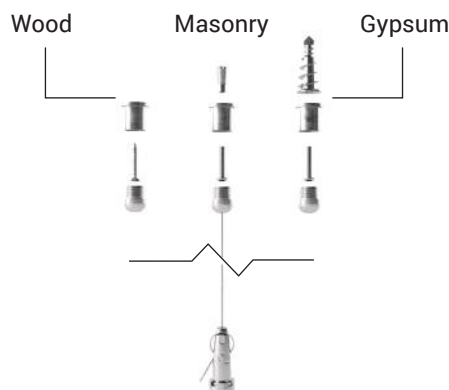

### Set of suspensions AWZ003 (1 pc.)

- Suitable only for PET clouds;
- Only a single product can be suspended per set;
- Set includes ceiling mounting (for T24 Armstrong profile);
- Ø1,5 mm wire rope L-50-2000 mm;
- Adjustable cable gripper;
- Two Ø1,5 mm wire ropes with metal plates L-1500 mm.

T24 Armstrong profile




### Adhesive fittings

- Included for each PET tile;
- Thickness 0,2 mm;
- Temperature for application or removal min 15°C;
- Temperature resistance 5-35°C;
- Adhesive fittings for wall or ceiling (glass / wood / plastic / ceramics / varnished surfaces)\*;
- Not suitable for use on vinyl wallpaper and anti-stick surfaces;


\* The adhesive must flow onto the surface and create full surface contact. The surface to be bond must be free of grease, loose particles and moisture!

## RANGE


### PET partition pattern types




ZB0 PLAIN




ZB1 DOT




ZB2 HEX



ZB3 FLOW




ZB4 DISCO



ZB5 GRATE

### PET partition sizes



800, 1200


2000



800, 1200


2400

### PET cloud sizes




827

300



1202

420



### PET tiles types and sizes

#### Square



200



400

#### Rectangle



400



400

600

#### Triangle



200



400

400

#### Hexagon



200



173

400

346

#### Diamond



200



115

400

230

## ADDITIONAL INFORMATION

To ensure smooth and easy assembly PET partitions are delivered without holes for fittings. This is done in order to mitigate any problems which may hinder assembly such as placement of ducting, lighting or internal building constructions.




### Caution

Only one way of PET Cloud suspension is allowed. Suspending product incorrectly may lead to product damage or people injury.



### Recommendations for use

PET partition patterns were designed for vertical use. Although it is not forbidden to suspend this product horizontally, we cannot guarantee performance and aesthetic look of the partition.

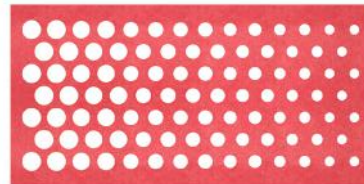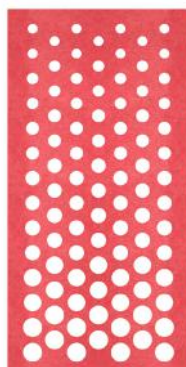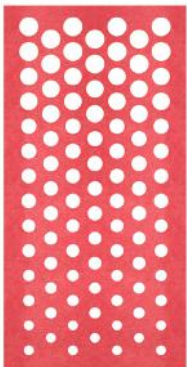

Please note that due to the size and shape of the PET Tiles not every Tile can be combined to create a uniform composition.

